


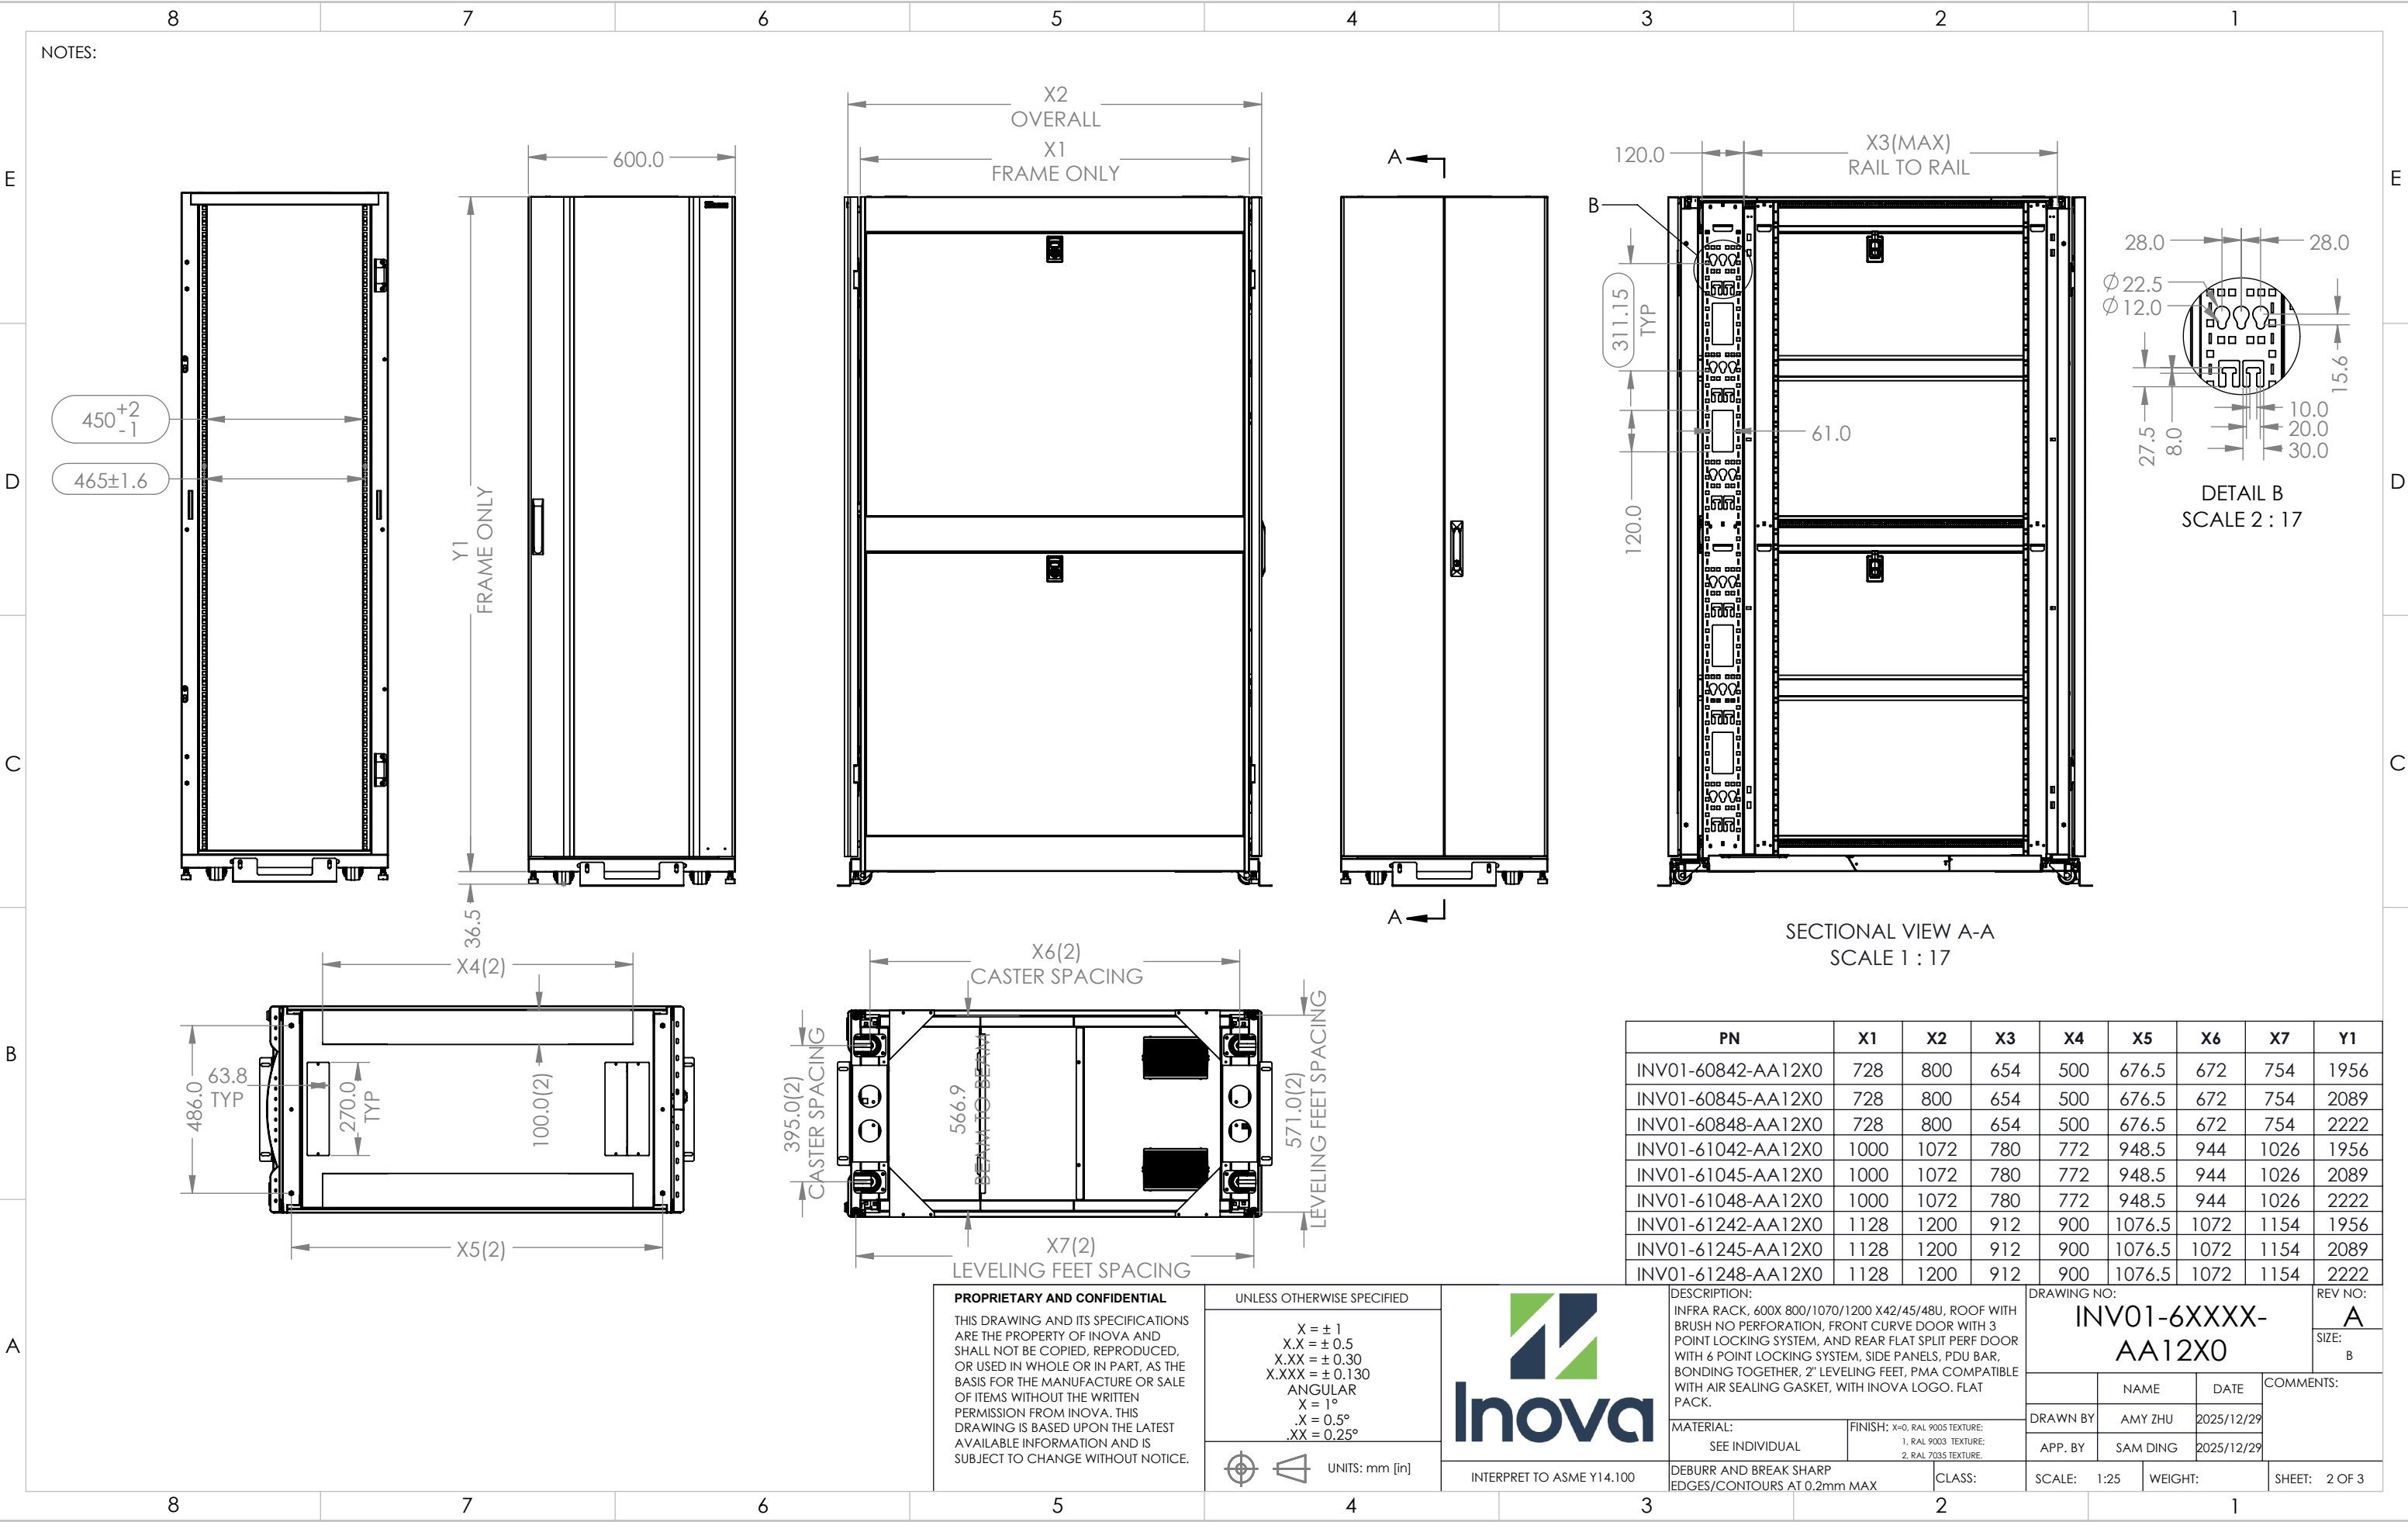

NOTES:

PROPRIETARY AND CONFIDENTIAL

THIS DRAWING AND ITS SPECIFICATIONS ARE THE PROPERTY OF INOVA AND SHALL NOT BE COPIED, REPRODUCED, OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT THE WRITTEN PERMISSION FROM INOVA. THIS DRAWING IS BASED UPON THE LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.

UNLESS OTHERWISE SPECIFIED

X = ± 1
X.X = ± 0.5
X.XX = ± 0.30
X.XXX = ± 0.130
ANGULAR
X = 1°
.X = 0.5°
.XX = 0.25°



UNITS: mm [in]



INTERPRET TO ASME Y14.100

DESCRIPTION:

INFRA RACK, 600X 800/1070/1200 X42/45/48U, ROOF WITH BRUSH NO PERFORATION, FRONT CURVE DOOR WITH 3 POINT LOCKING SYSTEM, AND REAR FLAT SPLIT PERF DOOR WITH 6 POINT LOCKING SYSTEM, SIDE PANELS, PDU BAR, BONDING TOGETHER, 2" LEVELING FEET, PMA COMPATIBLE WITH AIR SEALING GASKET, WITH INOVA LOGO. FLAT PACK.

MATERIAL:

SEE INDIVIDUAL

FINISH:

X=0, RAL 9005 TEXTURE:
1, RAL 9003 TEXTURE:
2, RAL 7035 TEXTURE.

DEBURR AND BREAK SHARP EDGES/CONTOURS AT 0.2mm MAX

CLASS:

DRAWING NO:

INV01-6XXXX-
AA12X0

REV NO:

A

SIZE:

B

NAME

DATE

COMMENTS:

DRAWN BY

AMY ZHU

APP. BY

SAM DING


SCALE:

1:25

WEIGHT:

SHEET:

2 OF 3

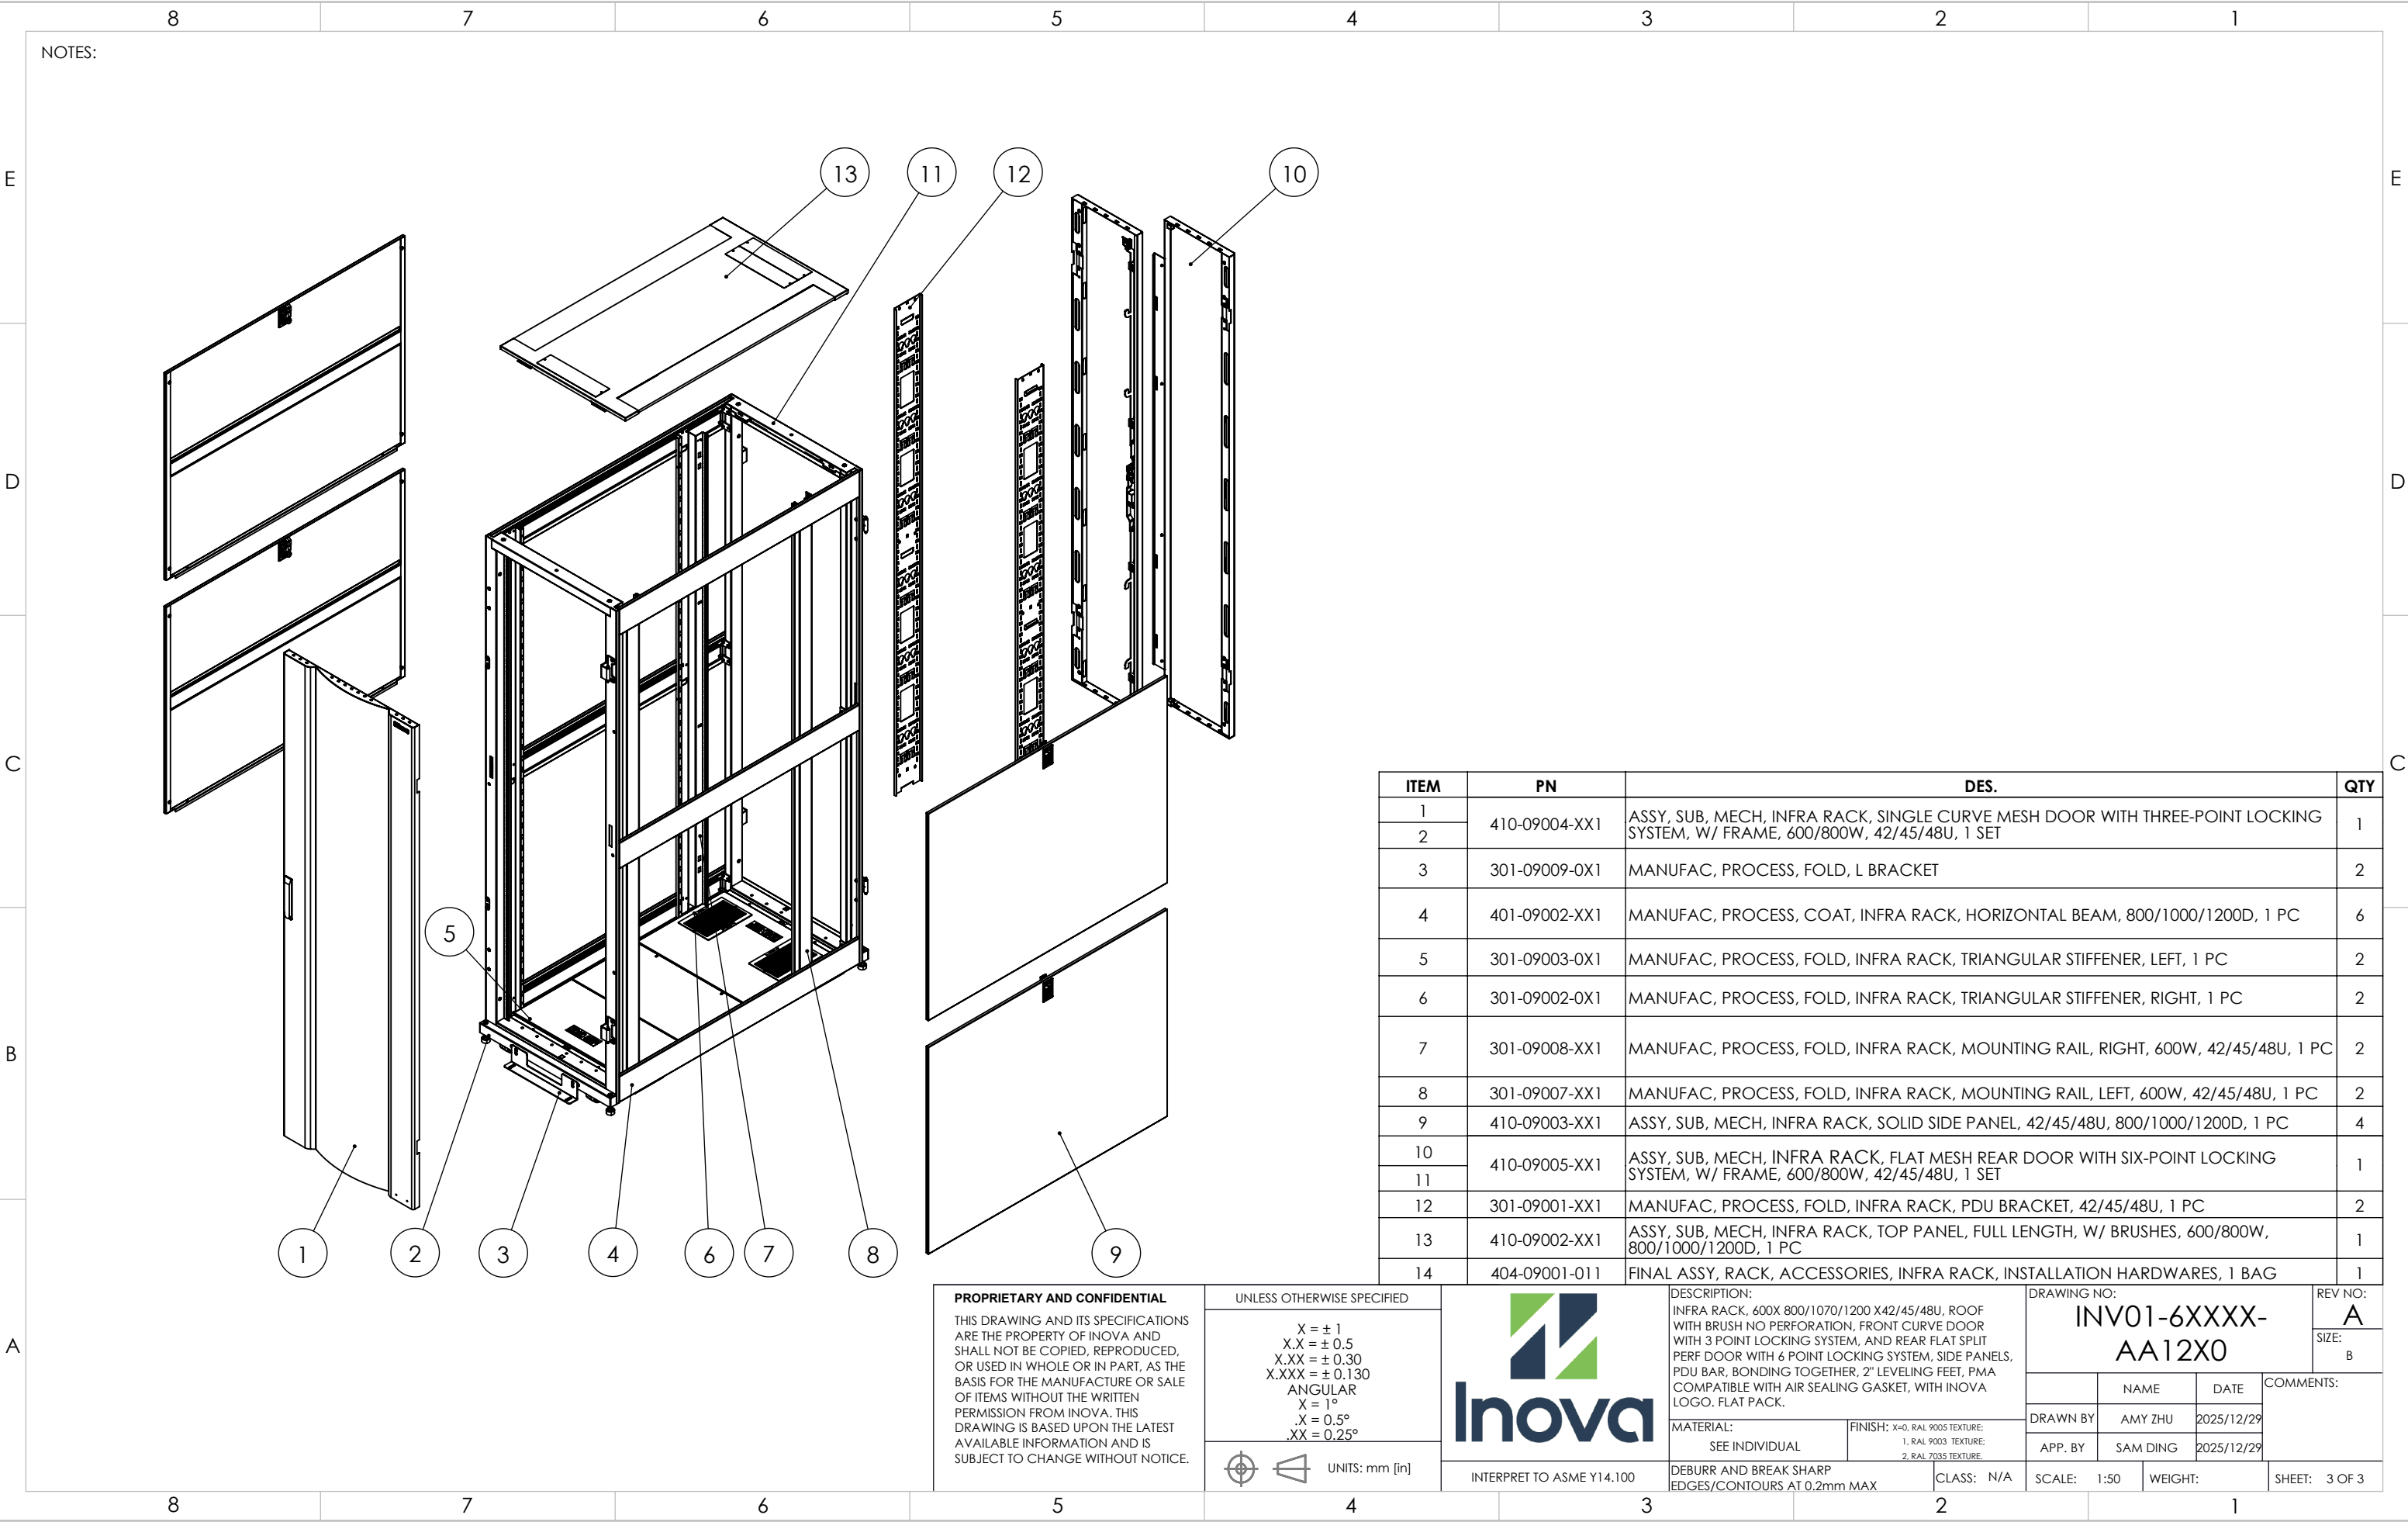

NOTES:

ITEM	PN	DES.	QTY
1	410-09004-XX1	ASSY, SUB, MECH, INFRA RACK, SINGLE CURVE MESH DOOR WITH THREE-POINT LOCKING SYSTEM, W/ FRAME, 600/800W, 42/45/48U, 1 SET	1
2			
3	301-09009-0X1	MANUFAC, PROCESS, FOLD, L BRACKET	2
4	401-09002-XX1	MANUFAC, PROCESS, COAT, INFRA RACK, HORIZONTAL BEAM, 800/1000/1200D, 1 PC	6
5	301-09003-0X1	MANUFAC, PROCESS, FOLD, INFRA RACK, TRIANGULAR STIFFENER, LEFT, 1 PC	2
6	301-09002-0X1	MANUFAC, PROCESS, FOLD, INFRA RACK, TRIANGULAR STIFFENER, RIGHT, 1 PC	2
7	301-09008-XX1	MANUFAC, PROCESS, FOLD, INFRA RACK, MOUNTING RAIL, RIGHT, 600W, 42/45/48U, 1 PC	2
8	301-09007-XX1	MANUFAC, PROCESS, FOLD, INFRA RACK, MOUNTING RAIL, LEFT, 600W, 42/45/48U, 1 PC	2
9	410-09003-XX1	ASSY, SUB, MECH, INFRA RACK, SOLID SIDE PANEL, 42/45/48U, 800/1000/1200D, 1 PC	4
10	410-09005-XX1	ASSY, SUB, MECH, INFRA RACK, FLAT MESH REAR DOOR WITH SIX-POINT LOCKING SYSTEM, W/ FRAME, 600/800W, 42/45/48U, 1 SET	1
11			
12	301-09001-XX1	MANUFAC, PROCESS, FOLD, INFRA RACK, PDU BRACKET, 42/45/48U, 1 PC	2
13	410-09002-XX1	ASSY, SUB, MECH, INFRA RACK, TOP PANEL, FULL LENGTH, W/ BRUSHES, 600/800W, 800/1000/1200D, 1 PC	1
14	404-09001-011	FINAL ASSY, RACK, ACCESSORIES, INFRA RACK, INSTALLATION HARDWARES, 1 BAG	1

PROPRIETARY AND CONFIDENTIAL

THIS DRAWING AND ITS SPECIFICATIONS ARE THE PROPERTY OF INOVA AND SHALL NOT BE COPIED, REPRODUCED, OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT THE WRITTEN PERMISSION FROM INOVA. THIS DRAWING IS BASED UPON THE LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.

UNLESS OTHERWISE SPECIFIED

X = ± 1
X.X = ± 0.5
X.XX = ± 0.30
X.XXX = ± 0.130
ANGULAR
X = 1°
.X = 0.5°
.XX = 0.25°

UNITS: mm [in]

DESCRIPTION:
INFRA RACK, 600X 800/1070/1200 X42/45/48U, ROOF WITH BRUSH NO PERFORATION, FRONT CURVE DOOR WITH 3 POINT LOCKING SYSTEM, AND REAR FLAT SPLIT PERF DOOR WITH 6 POINT LOCKING SYSTEM, SIDE PANELS, PDU BAR, BONDING TOGETHER, 2" LEVELING FEET, PMA COMPATIBLE WITH AIR SEALING GASKET, WITH INOVA LOGO, FLAT PACK.

MATERIAL: SEE INDIVIDUAL	FINISH: X=0, RAL 9005 TEXTURE; 1, RAL 9003 TEXTURE; 2, RAL 7035 TEXTURE.
DEBURR AND BREAK SHARP EDGES/CONTOURS AT 0.2mm MAX	CLASS: N/A

DRAWING NO:
INV01-6XXXX-AA12X0

NAME	DATE	COMMENTS:
DRAWN BY AMY ZHU	2025/12/29	
APP. BY SAM DING	2025/12/29	

REV NO:
A
SIZE:
B

SCALE: 1:50 WEIGHT: SHEET: 3 OF 3