



NOTES:


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	FULL RELEASED	2023/12/3	CT

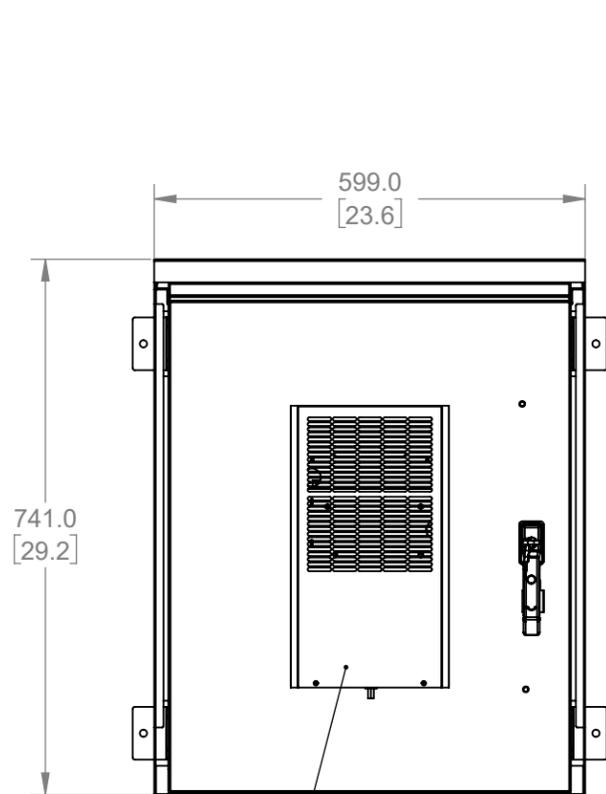

Cooling Unit XXXKW

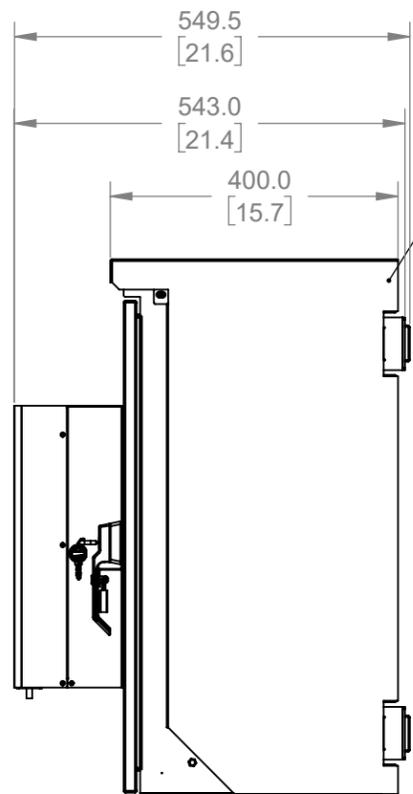


Heat Shield (Removable)

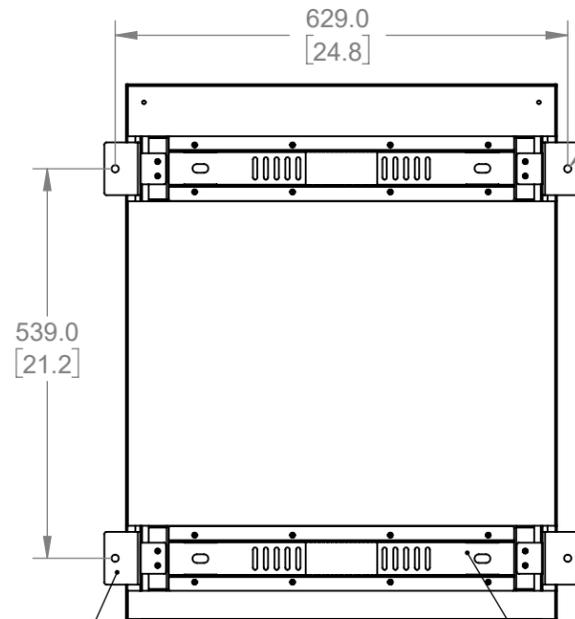

Wall-mount Kits

Pole-mount Kits

Ø 10.0 [0.4]




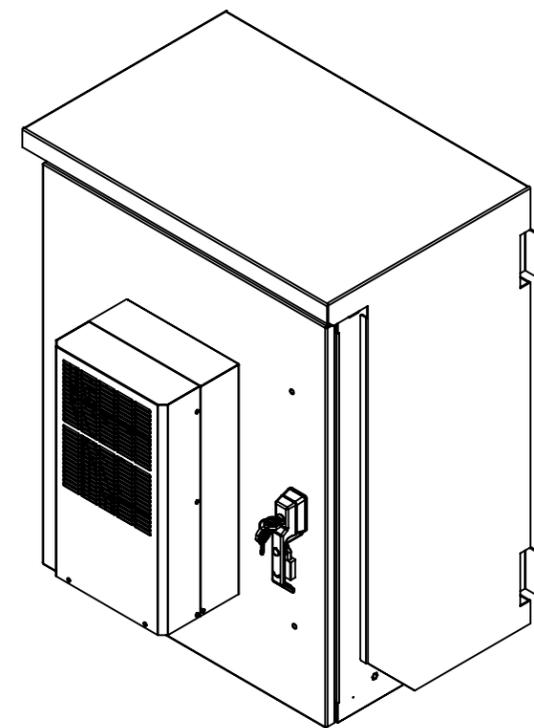


1. FINISH IS RAL 7035 - LIGHT GRAY
2. POLE-MOUNT VIA STRAP/BANDING (NOT INCLUDED), MAX STRAP WIDTH: 1.0" (25 MM)
3. 0.39" (10 MM) THICK POLYURETHANE INSULATION APPLIED TO ALL INTERIOR SURFACES (NOT SHOWN); MAX TEMP RATING: 212F (100C)
4. DOOR IS ELECTRICALLY BONDED TO ENCLOSURE BODY VIA GROUND STRAP (NOT SHOWN)
5. COOLING CAPACITY: 300W

PROPRIETARY AND CONFIDENTIAL THIS DRAWING AND ITS SPECIFICATIONS ARE THE PROPERTY OF INOVA AND SHALL NOT BE COPIED, REPRODUCED, OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT THE WRITTEN PERMISSION FROM INOVA. THIS DRAWING IS BASED UPON THE LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.	UNLESS OTHERWISE SPECIFIED			DESCRIPTION: NEMA 4 ENCL; 22"W X 27.9"H X 14.1"D; 300W COOLING; W/HEAT SHLD; PADLOCK		DRAWING NO: INV04-00002		REV NO: A	
	X = ± 1 X.X = ± 0.5 X.XX = ± 0.30 X.XXX = ± 0.130 ANGULAR X = 1° .X = 0.5° .XX = 0.25°			MATERIAL: AL		FINISH: RAL7035		SIZE: B	
	UNITS: mm [in]			INTERPRET TO ASME Y14.100		DEBURR AND BREAK SHARP EDGES/CONTOURS AT 0.2mm MAX		CLASS: A	
				SCALE: 1:10		WEIGHT:		SHEET: 1 OF 2	



NAME	DATE
DRAWN BY: PHILI FENG	2023/12/3
APP. BY: PHILI FENG	2023/12/3

NOTES:

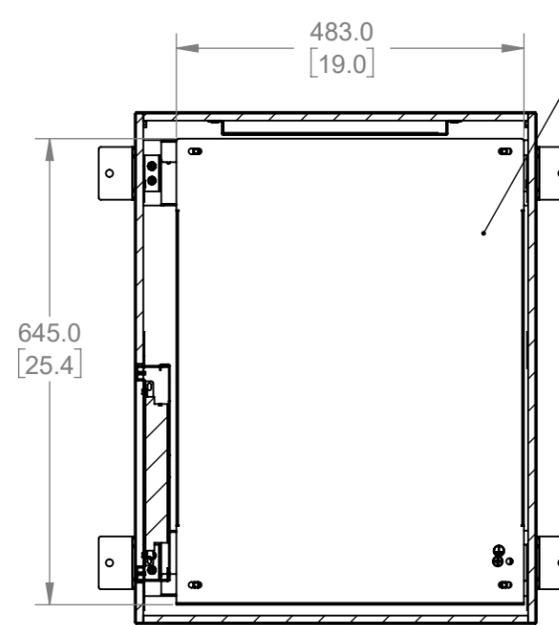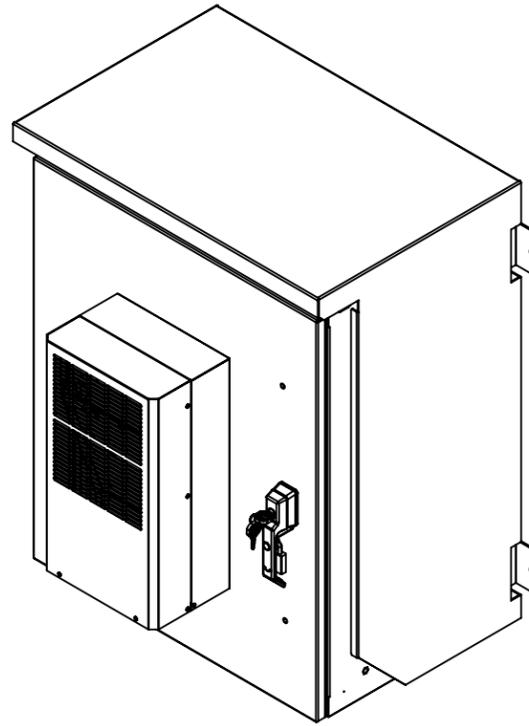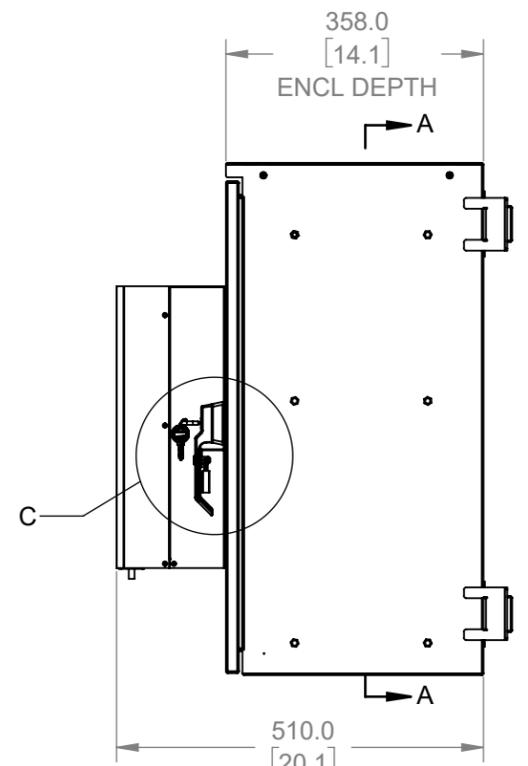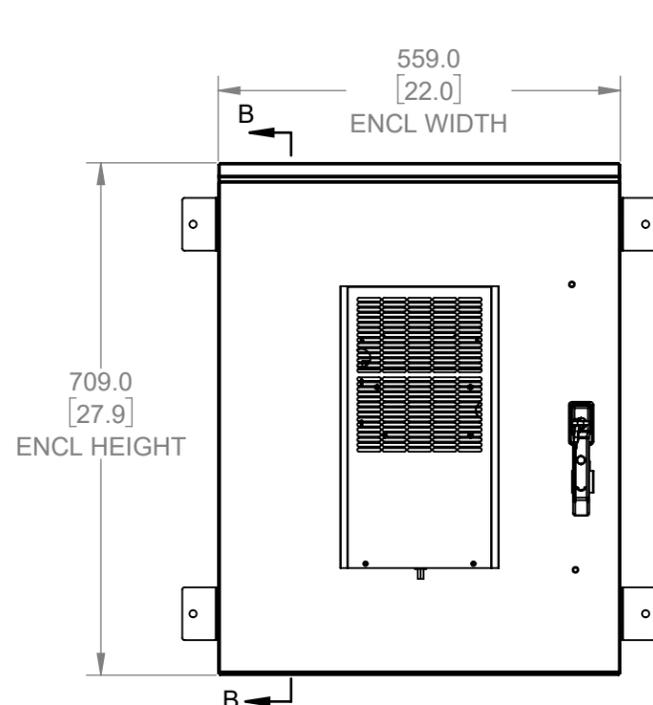

Back Plate (Removable)
Customize Holes For Equipment Mounting

Power Unit

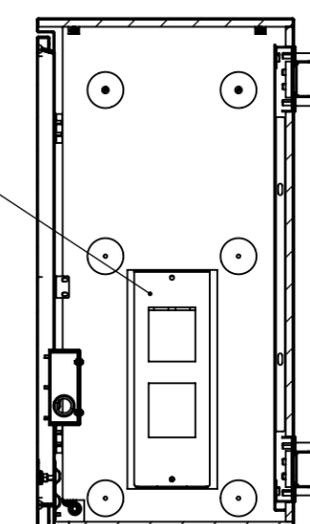

DETAIL C
SCALE 1 : 5
PADLOCK PROVISION

SECTION A-A

SECTION B-B

<p>PROPRIETARY AND CONFIDENTIAL</p> <p>THIS DRAWING AND ITS SPECIFICATIONS ARE THE PROPERTY OF INOVA AND SHALL NOT BE COPIED, REPRODUCED, OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT THE WRITTEN PERMISSION FROM INOVA. THIS DRAWING IS BASED UPON THE LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.</p>	UNLESS OTHERWISE SPECIFIED			DESCRIPTION: NEMA 4 ENCL; 22"W X 27.9"H X 14.1"D; 300W COOLING; W/HEAT SHLD; PADLOCK		DRAWING NO: INV04-00002		REV NO: A										
	<p>X = ± 1 X.X = ± 0.5 X.XX = ± 0.30 X.XXX = ± 0.130</p> <p>ANGULAR X = 1° .X = 0.5° .XX = 0.25°</p>				MATERIAL: AL	FINISH: RAL7035	<table border="1"> <tr> <th>NAME</th> <th>DATE</th> <th>COMMENTS:</th> </tr> <tr> <td>PHILI FENG</td> <td>2023/12/3</td> <td></td> </tr> <tr> <td>PHILI FENG</td> <td>2023/12/3</td> <td></td> </tr> </table>		NAME	DATE	COMMENTS:	PHILI FENG	2023/12/3		PHILI FENG	2023/12/3		SIZE: B
	NAME	DATE			COMMENTS:													
	PHILI FENG	2023/12/3																
PHILI FENG	2023/12/3																	
UNITS: mm [in]		INTERPRET TO ASME Y14.100	DEBURR AND BREAK SHARP EDGES/CONTOURS AT 0.2mm MAX	CLASS: A	SCALE: 1:10	WEIGHT:	SHEET: 2 OF 2											